




# Metal Rebuilding and Shaft Repair

- High compressive strength
- Choice of mild steel aluminum or nonmetallic fillers
- Can be machined, drilled or tapped after cure
- Excellent resistance to aggressive chemicals



## REPAIR OR REBUILD DAMAGED PARTS

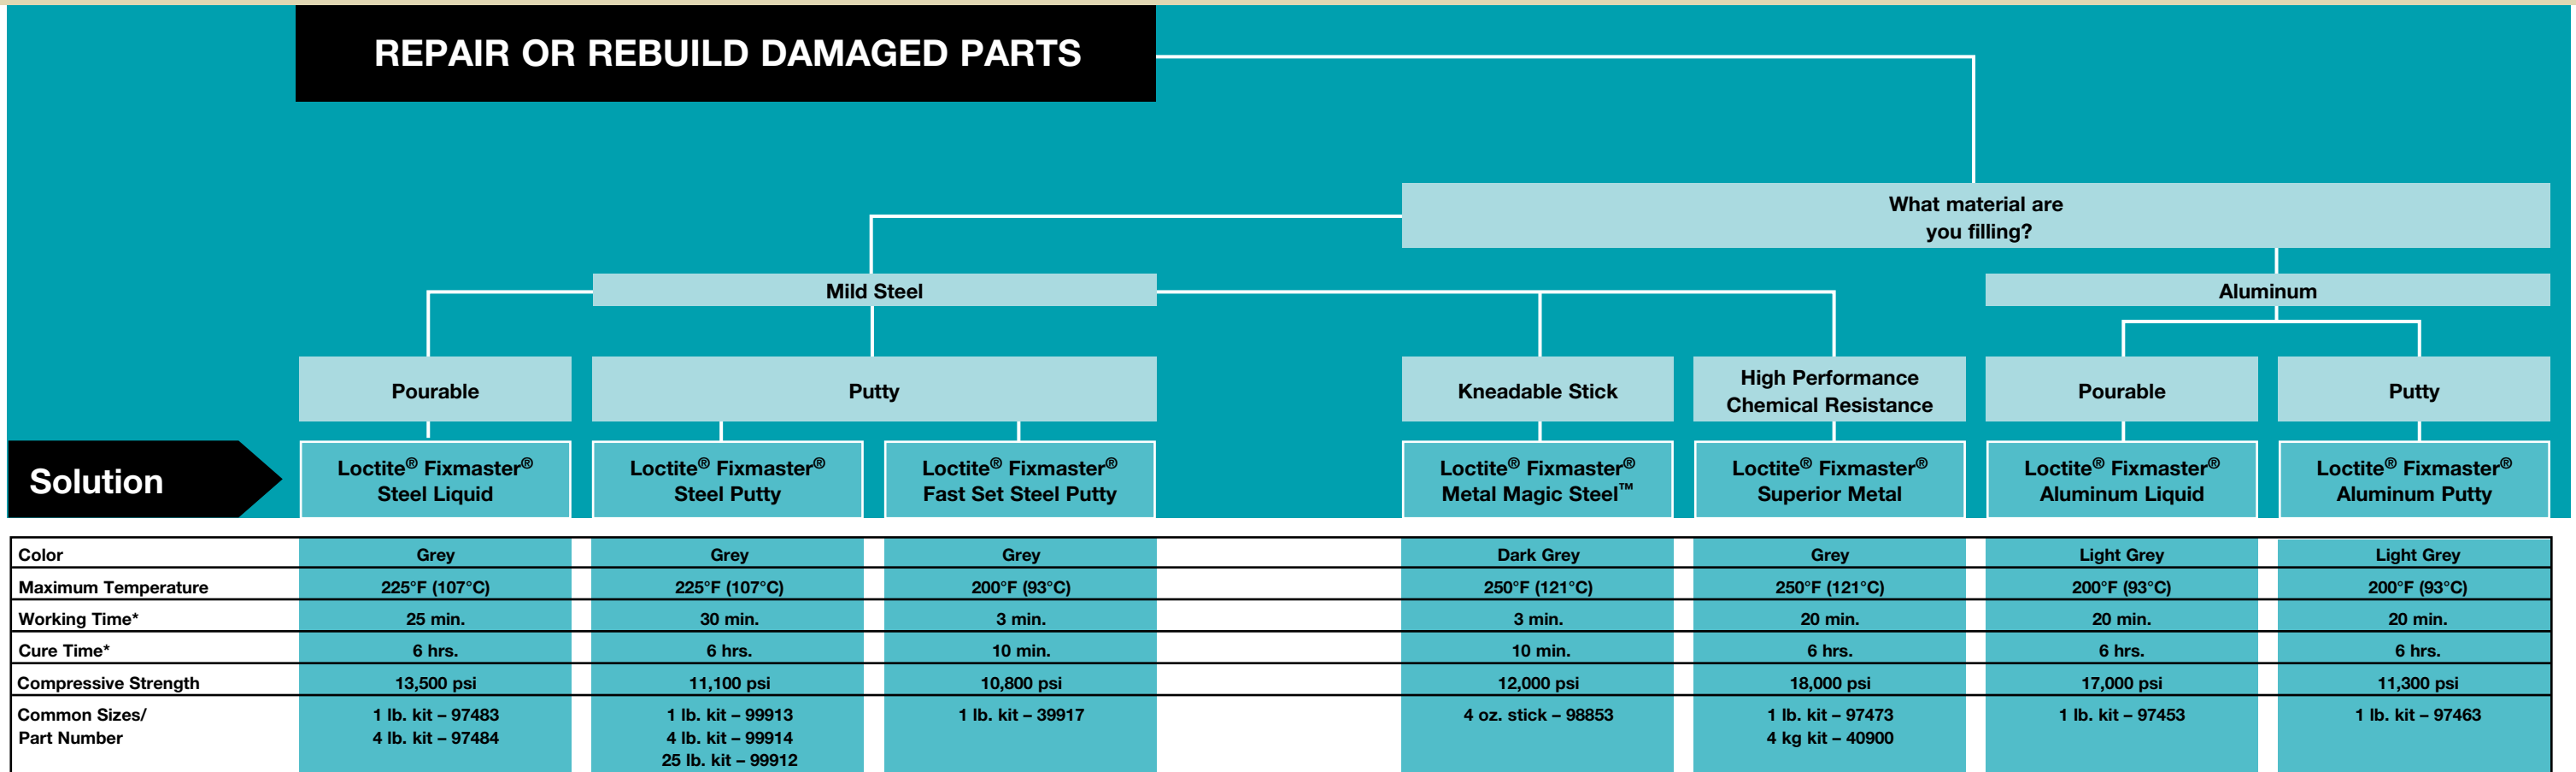

\* at 77°F (25°C)

### Additional Products

| Name   | Part No. | Pkg. Size   |
|--|----------|-------------|
| Loctite® Fixmaster® Stainless Steel Putty    | 97443    | 1 lb. kit   |
| Loctite® Fixmaster® Fast Set Steel Epoxy     | 96604    | 50 ml cart. |
| Loctite® Fixmaster® Wet Surface Repair Putty | 96583    | 1 lb. kit   |
| Loctite® Fixmaster® Underwater Repair Epoxy  | 82093    | 4 oz. stick |



#### Loctite® Fixmaster® Steel Liquid

High steel content. Pourable liquid filler used for making fixtures and molding. ABS Approved.



#### Loctite® Fixmaster® Steel Putty

High steel content putty. Recommended for repairing and rebuilding worn steel components, such as bearing and fan housings. ABS Approved.



#### Loctite® Fixmaster® Fast Set Steel Putty

A fast curing version of steel putty. Recommended for repairing pipes and other emergency repairs. ABS Approved.



#### Loctite® Fixmaster® Metal Magic Steel™

Kneadable, two-part paste. Working time is 3 minutes – sets in 10 minutes. Adheres to damp surfaces. Can be drilled, filed and painted. Ideal for emergency sealing of leaking tanks and pipes. Smooths welds, repairs small cracks in castings and fills oversized bolt holes. NSF/ANSI 61.



#### Loctite® Fixmaster® Superior Metal

Formulated with fine alloy particles for high compressive strength and chemical resistance. Recommended for use on all metals. Outstanding compressive strength, chemical resistance, non-rusting.



#### Loctite® Fixmaster® Aluminum Liquid

Fluid, self-leveling aluminum liquid. Can be poured into molds and cavities. Recommended for casting aluminum replacement parts and for making molds. ABS Approved.



#### Loctite® Fixmaster® Aluminum Putty

General purpose, aluminum putty for repair of all aluminum alloy components. ABS Approved.